

## FORWARD-R



## FORWARD-R

Classical and simple cylindrical shape with overall air flow design, U-arm box with build-in driver creates it the proportionate style.

Made of powder-coated aluminium housing and support arm with internal mechanical structures.

Inclination of 2\*90° on horizontal plane and 350° rotation around the vertical axis, with mechanical aiming lock.

A variety of installations: Track, Recessed projectors.

**C.o.B LED versions** with passive dissipation.

## Electronic Control gear

-Switchable, & customized.

## ICRS1

-Light distributions: narrow spot, spot, flood, oval flood

**TRACK**: 3-circuit adapter, installation on three-phase track systems.

## Recessed installation(easy innovations)

-Die-casting aluminium cover mounting ring


-Fixing for ceiling thickness of 1-25mm

-Very shallow recessed depth: with the minimum 50mm recessed depth to allow the limited space installations to produce the excellent light effect

**Applications**: shops, showroom, special areas lighting.



LED C.o.B module



Different light colours



Visual wellness with  
Optional optics acc



Excellent thermal Management



Different housing colours



EMC-optimised



Different light distributions



Oval flood can be freely rotated




Tiltable



350° Rotatable




Tools free installation



Switchable



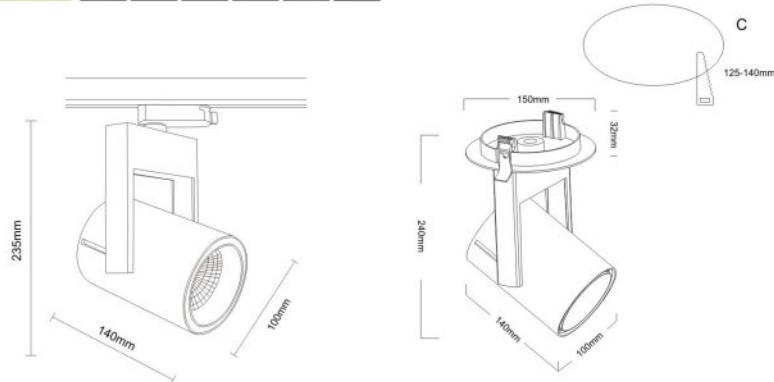

### FORWARD-R

POWER (W)	Track CODE NO.	Recessed CODE NO.	X=	Y=	Z=	X=1 LUMEN FLUX	X=2 LUMEN FLUX	X=3 LUMEN FLUX	PCS	KG
25	622-25-X-Y-Z	623-25-X-Y-Z	X=1 X=2			2250	1950	2100	12/8	10/8.5
30	622-30-X-Y-Z	623-30-X-Y-Z	X=3 X=M X=B X=W X=S	Y=S25 Y=S26 Y=S27	Z=A Z=B Z=C	2700	2400	2600	12/8	10/8.5
34	622-34-X-Y-Z	623-34-X-Y-Z				2950	2900	2950	12/8	10/8.5

NOTE1:X(K+Ra)

1=3000K,80+

2=3000K,90+

3=3500K,90+

M=MEAT

B=BAKED BREAD

W=WOOD

S=SEAFOOD

NOTE2:Y(Angle)

S25=10°

S26=23°

S27=38°

NOTE3 :Z(Housing Color)

A=White

B=Black

C=Grey

All standard versions include electronic power gear, transparent safety glass/polymer sheet and front loop, correspondingly.